



# INSTRUCTIONS FOR INSTALLING PILE SLIDE/GUIDE

## PARTS REQUIRED

HOT DIPPED GALVANIZED CAN BE SUBSTITUTED FOR STAINLESS STEEL

1. 1/2"X5" STAINLESS STEEL CARRIAGE BOLT (4)
2. 1/2"X3" STAINLESS STEEL CARRIAGE BOLT (2)
3. 1/2"X3" STAINLESS STEEL HEX HEAD BOLT (2)
4. 1/2" STAINLESS STEEL FENDER WASHER (10)
5. 1/2" STAINLESS STEEL LOCKNUT (8)
6. 1/2" PLASTIC FLAT WASHER (10)
7. 3/8"X4" STAINLESS STEEL LAG BOLT (2)
8. 3/8" STAINLESS STEEL FLAT WASHER (2)

## INSTRUCTIONS

Clear the location of any debris where the slide will be mounted. Confirm slide will mount flush on top (horizontally) and side (vertically). If slide will not mount flush, determine if shims should be used or if the dock surface will need to be prepped further.

1. Mark locations to drill the holes for the bolts in the dock using the slide as a template. Using a 9/16" drill bit, drill all the holes required. Mount slide to the vertical portion of the dock using (4) 1/2"X5" carriage bolts, (4) 1/2" washers, and (4) 1/2" locknuts and to the deck of the dock using (2) 1/2"X3" carriage bolts, (2) 1/2" washers, and (2) 1/2" locknuts. See **Figures 1 & 2**.
2. To adjust the position of the guide in the slide remove the 1/2" bolts from the area indicated by the black arrows in **Figure 3**. Reposition the HDPE guide and drill 9/16" diameter hole in the HDPE guide using the existing holes identified by the black arrows in **Figure 3** as a template. Reinstall (2) 1/2"x3" stainless steel hex head bolts, (2) 1/2" stainless steel locknuts, (4) 1/2" stainless steel flat washer, and (4) 1/2" plastic washers through the slide and guide.

### Note:

Rear of guide should be in range indicated in **Figure 4**. If installed outside of this range warranty will be voided. In high traffic areas it is recommended that the plate that sticks out beyond the slide guide be cut flush to the back of the slide guide.

3. For installations in rough water areas, drill (2) 15/64" pilot holes where indicated by the white arrows in **Figure 4**. Install (2) 3/8"X4" lag bolts and (2) 3/8" flat washer.

For more information contact:

[www.seapowermarineproducts.com](http://www.seapowermarineproducts.com)

843-884-5656

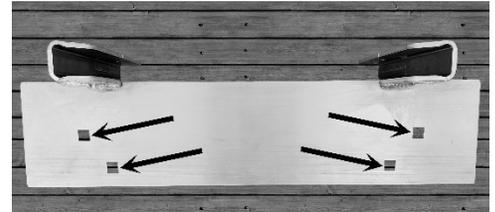


Figure 1

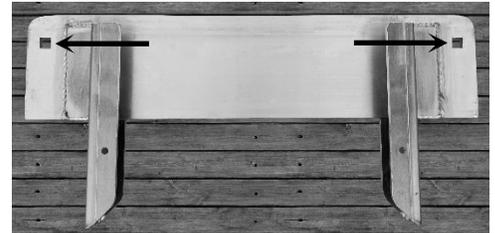


Figure 2



Figure 3

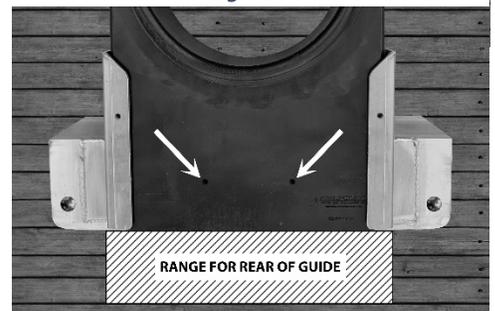


Figure 4

Patent Numbers

Boat Lifts: US 9,132,897; US 9,352,812; US 9,604,709; US 10,086,919; US 10,370,073

Pile Guides, Slide Guides and Stabilizers: US 10,267,003; US D828,746; US D828,747; US D828,747; US D837,041; US D826,702; 62/851,783; 29/699,280; 29/722,469; 29/723,576; 29/723,579

Floating Platform: 16/794,670

Trademarks :87/442,461; 5,788,367; 88/567,151

Rev. 8 - 02/21/22