



INSTRUCTIONS FOR INSTALLING PILE SLIDE/GUIDE

PARTS REQUIRED

1. ALUMINUM SLIDE (1)
2. HDPE PILE GUIDE (1)
3. 1/2"X5" STAINLESS STEEL CARRIAGE BOLT (4)
4. 1/2"X3" STAINLESS STEEL CARRIAGE BOLT (2)
5. 1/2" STAINLESS STEEL FLAT WASHER (6)
6. 1/2" STAINLESS STEEL LOCKNUT (6)
7. 3/8"X3" STAINLESS STEEL HEX HEAD BOLT (2)
8. 3/8"X4" STAINLESS STEEL LAG BOLT (2)
9. 3/8" STAINLESS STEEL FLAT WASHER (6)
10. 3/8" PLASTIC FLAT WASHER (10)
11. 3/8" STAINLESS STEEL LOCKNUT (2)
12. ANTI-SEIZE COMPOUND – APPLY TO ALL THREADS

INSTRUCTIONS

Clear the location of any debris where the slide will be mounted. Confirm slide will mount flush on top (horizontally) and side (vertically). If slide will not mount flush, determine if shims should be used or if the dock surface will need to be prepped further.

1. Mark locations to drill the holes for the bolts in the dock using the slide as a template. Using a 9/16" drill bit, drill all the holes required. Mount slide to the vertical portion of the dock using (4) 1/2"X5" carriage bolts, (4) 1/2" washers, and (4) 1/2" locknuts and to the deck of the dock using (2) 1/2"X3" carriage bolts, (2) 1/2" washers, and (2) 1/2" locknuts. See **Figures 1 & 2**.
2. Slide HDPE pile guide into slide and align as desired. Once final position is selected, install (2) 3/8"X4" lag bolts, (2) 3/8" flat washer, and (2) 3/8" plastic washers through slide and HDPE guide as indicated by the black arrows in **Figure 3**. For installations in rough water areas, drill (2) 15/64" pilot holes where indicated by the white arrows in Figure 3. Install (2) 3/8"X4" lag bolts, (2) 3/8" flat washer, and (2) 3/8" plastic washers through the HDPE guide and slide.

Note:

Rear of guide should be in range indicated. If installed outside of this range warranty will be voided. In high traffic areas it is recommended that the plate that sticks out beyond the slide guide be cut flush to the back of the slide guide.

3. Drill 3/8" diameter hole in guide using predrilled holes in slide as a template. See black arrows in **Figure 4**. Install (2) 3/8"X3" hex head bolts, (4) 3/8" flat washer, and (4) 3/8" plastic washers.

For more information contact:

www.seapowermarineproducts.com

843-884-5656


Patent Numbers

Boat Lifts: US 9,132,897; US 9,352,812; US 9,604,709; US 10,086,919; US 10,370,073

Pile Guides, Slide Guides and Stabilizers: US 10,267,003; US D828,746; US D828,747; US D828,747; US D837,041; US D826,702; 62/851,783; 29/699,280; 29/722,469; 29/723,576; 29/723,579

Floating Platform: 16/794,670

Trademarks :87/442,461; 5,788,367; 88/567,151

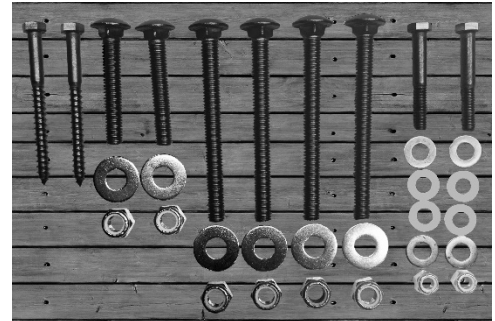

Hardware Provided

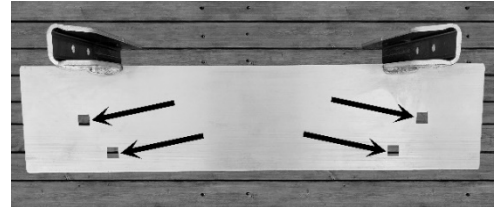


Figure 1



Figure 2



Figure 3

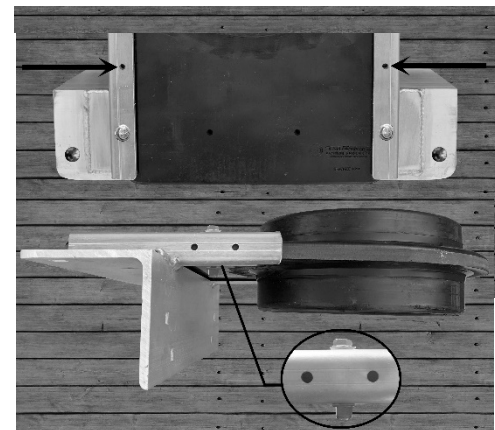


Figure 4

Rev. 7 - 03/02/21